

施工指南 Construction Guide



01.

符合要求的基面, 輥塗萬磊金裝白色/透明底漆(1/2遍)

Vanlei Penetrating Primer + Vanlei Limestone + Vanlei No Trace Topcoat



萬磊公衆號 Official Accounts



02.

用不鏽鋼批刀塗抹一層萬磊石本石 主材(厚度為一粒砂約1 -1.5mm)

Apply a layer of Wanlei Stone base material (thickness of approximately 1-1.5 mm) using a stainless steel trowel.



小程序 Applet



03.

乾燥後,使用80#砂紙打磨或鏟刀剷 掉棘手處,至平整後清除灰塵。

After drying, use 80# sandpaper to sand or a scraper to remove any rough areas until smooth, then remove any dust.



施工教程 Construction Tutorial



04.

第二道不規律平批、收平, 待自然乾燥後進入打磨工序。

打磨工序: 80粗磨 -- 180細打 -- 320目精磨

Second coat: apply an uneven coat and level it off. Allow to dry naturally before proceeding to the sanding process.

Sanding process: 80 grit coarse sanding — 180 grit fine sanding — 320 grit fine sanding



05

罩面層(推薦使用無痕罩面),均勻輥 塗兩遍

Topcoat (we recommend using a seamless topcoat), apply two even coats with a roller.



06

罩面完成乾透後,使用2000目抛光砂 紙去掉毛刺增加手感。

After the coating has completely dried, use 2000-grit sandpaper to remove burrs and improve the feel.

色彩系统 Colour System

產品基料 / Product Base Material 色漿重量 / Colorant's Weight
石本石 - 馬恩 / Limestone - Mann RMS - M13(100g)
產品代碼 / Product Code 顏色代碼 / Color code

產品基料 / Base Material	是否可以調色 / Can the colour be adjusted?
石本石 - 馬恩 / Limestone - Mann	~
石本石 - 塞納 / Limestone - Sena	×

説明 / Explanation:

石本石擁有2種形式的基料, 其壹為使用無機色漿調色, 另壹種為暫不支持預調色的天然色系。 Limestone has two types of base materials: one is coloured using inorganic colour paste, and the other is a natural colour series that does not currently support pre-colouring.





石本石 - 馬恩 / Limestone - Mann

RMS 基料 / Base



石本石 - 塞納 / Limestone - Sena


NBS 本色 / Natural










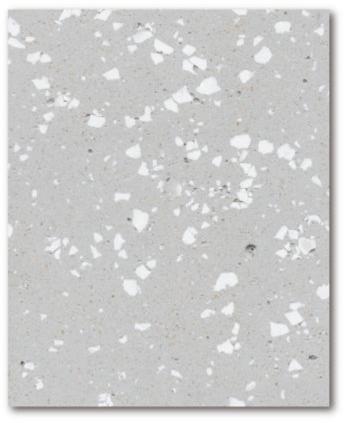



RMS - 6281(100g)



石本石 - 馬恩 / Limestone - Mann

RMS - M13(100g)



石本石 - 馬恩 / Limestone - Mann

RMS - M17(100g)



石本石 - 馬恩 / Limestone - Mann

RMS - 6280(100g)




















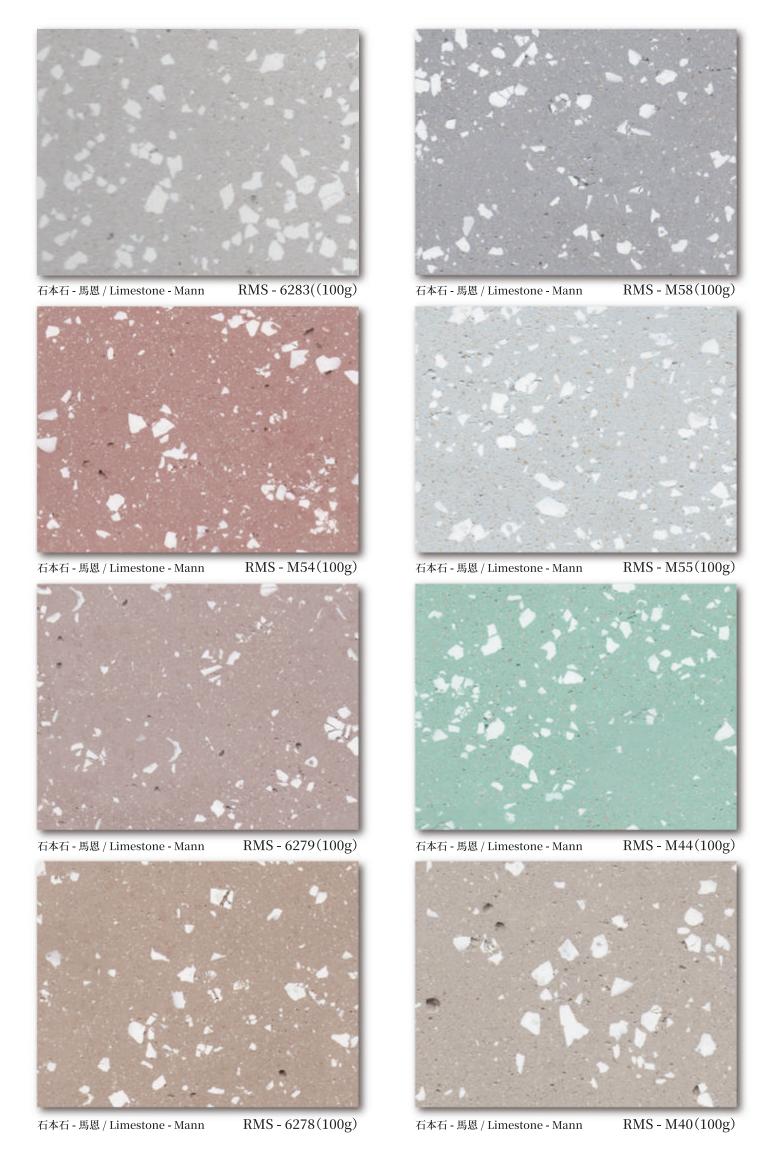



「石本石」,即「石頭本來的樣子」。我們回歸岩石的本質—— 取自簋萬年大地孕育的天然礦藏(礦物石灰、大理石粉),以 創新工藝將其精髓提煉、活化, 化為流動的「液態石材」。我 們摒棄非自然的添加與掺雜, 只專注於還原岩石最本真的 肌理、色澤與生態屬性。石之根本, 在此新生。

本源純粹: 「石本石」根植於天然石灰岩礦藏, 精選核心成分(熟石灰、精细大理石粉, 無機額填料, 奈米碳酸鈣粉), 全程0添加化學合成物, 100%呈現大地賦予的原生色系與質感。係岩石本質的純粹表達, 師法自然, 純天然材質。

充分調配的熟石灰、精細大理石粉、無機顏/填料、奈米碳酸 鈣粉 主要成份 /

產品淨重 /

理論耗材 /

石本石Lime Stone可以應用於大多數固體表面,但需要確保表面徹底乾燥和老化。如有必要,使用特定產品重新表面處理。 適用底材 /

混凝土砌塊、磚砌體和類似背景等原始基材必須使用基礎 石膏進行塗抹,以實現水平和垂直方向筆直的表面找平。

準備工具 /

色漿混合 說明:/

適用範圍 /

Pure Origin: "Stone Essence" is rooted in natural limestone deposits, carefu selecting core components (slaked lime, fine marble powd inorganic pigments and fillers, nano-calcium carbonate powde. The entire process involves zero addition of chemical syntheti 100% showcasing the earth's original color palette and texture is a pure expression of the essence of rock, inspired by nature.

Main ingredient /

Fully blended quicklime, fine marble powder, inorganic pigments/fillers, and nano-calcium carbonate powder.

Net weight /

Applicable

Lime Stone can be applied to most solid surfaces, but it is important to ensure that the surface is completely dry and cured. If necessary, use a specific product to re-treat the surface. Seams on medium-density fiberboard surfaces should be covered with tape. Original substrates such as concrete blocks, brick masonry, and similar backgrounds must be coated with base plaster to achieve straight surfaces in both horizontal and vertical dispetitions.

covered with tape.

Original substrates such as concrete blocks, brick masonry, and similar backgrounds must be coated with base plaster to achieve straight surfaces in both horizontal and vertical directions. *If there are cracks in the wall, apply an appropriate crack filler first (this product does not have the capability to serve as a filler)

Preparation tools /

Scraping knife, wool roller, sanding machine, dust removal brush

Mixing Instructions

Scope of application

Suitable for interior and exterior walls, it has no seams making it easy to clean and maintain.

Complemen-tary products



29°釉質柔光光澤, 溫潤石質



獨家材料, 獨家自然倒角紋理, 純 法式石材肌理感



通體液態石材, 冰冷質感。



純天然材質, 0添加0摻和, 100%原色。



師法自然。無任何有機合成物,只 取自然界現存的色系。

Teach nature. No organic synthetics.Only take the existin



觸感/自帶滑面手感, 豐滿的 不像實力派

佛山市南海萬磊建築塗料有限公司 Foshan City Nanhai Wanlei Building Paint





广东生产基地(代码FS) 佛山市南海区狮山镇松岗万石管理区 象头岗万石村工业路2号

广州分公司

广**西生产基地(代码QT)** 广西壮族自治区贵港市覃塘区产业园甘化园区

公司根据产品技术和发展需要,有权对产品配方进行更新升级,而不 对外另行公布,请以最新样板册颜色为准,不便之处,敬请原谅!

4000-147-187 www.fswanlei.com